

### Products in Family


DRI520P6S/4GB (2 x 2GB 1R DIMMs)  
 DRI520P6/8GB (2 x 4GB 2R DIMMs)  
 DRI520P6/16GB (2 x 8GB 4R DIMMs)



Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.20" x 5.25") Data Transfer Rate: 5.3 Gigabytes/sec Operating Voltage: 1.8 V ±0.1 Error Checking and Correction (ECC) bits Supports Intel SDDC and Chipkill Advanced ECC Features Fully RoHS Compliant	The DRI520P6S/4GB and DRI520P6/8GB upgrades consist of a matched pair of DDR2-667 DIMMs. The DRI520P6/16GB upgrade consists of a matched pair of DDR2-533 DIMMs. All DIMMs are Registered with address/command parity functionality. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	IBM Product	Supported in these IBM systems:
DRI520P6S/4GB DRI520P6/8GB DRI520P6/16GB	4532 4523 4524	Power 520 (8203-E4A), 520 (9407-M15), 520 (9408-M25), 550 (8204-E8A), 550 (9409-M50)

### Front view

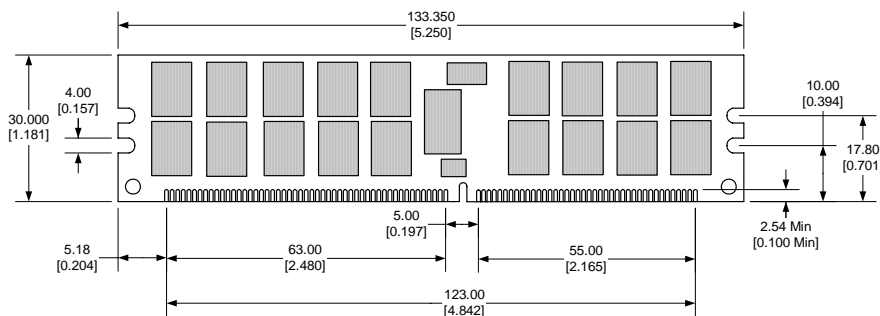


### Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

### Back view

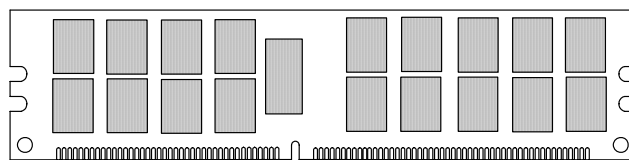

### Side view

